
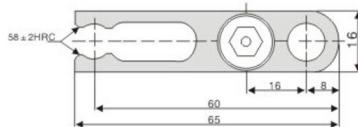


標準限位夾，對延遲模具的分開和閉合是非常有用的，它能夠通過增加夾子的數量來增大限位夾的荷重。

Standard locating clamps are very useful to postpone the open and close of the mold. It can increase the locating clamp's load by add clamps.

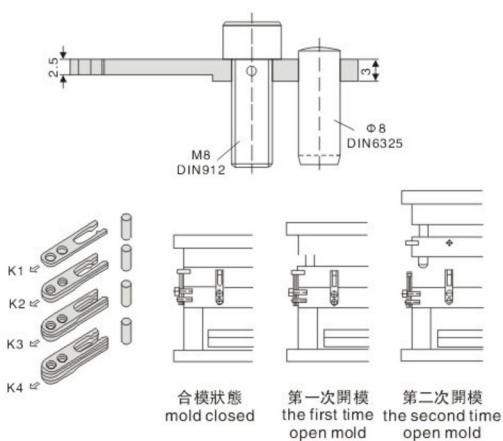

Material M材質	Hardness 硬度
1.8159	HRC45° ± 3°

※注意：下表中的荷重值是通過安裝一、二、三或更多的夾子而得來的，它是一組近似值，僅供參考。

Note: The load datas are from installed clamps, they are approximation just for reference.

Type	荷重/load(kgf)				Price 單價(¥)
	K1	K2	K3	K4	
JHN25.651608	7.5	15	22.5	30	350.00