


斜孔式鎖模塊

LOCKING BLOCKS WITH ANGULAR PINS HOLE

塑膠模
模用

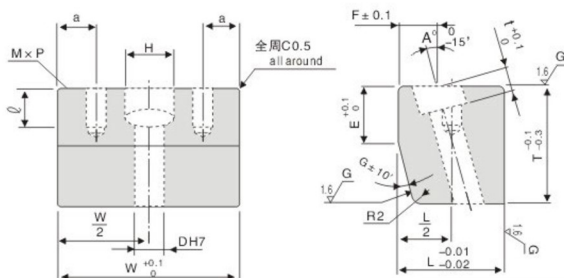

Material	Hardness	Heat Treatment
M材質	硬度	熱處理
SKS3	HRC53°-56°	真空處理 Vacuumed

DH7	H	F	ℓ	M × P	t	a	L	Catalog No.		T	W	E appoint 1mmunit	appoint 1° unit	
								Type	D				A	B
6	+0.012 0	10	6	8	4 × 0.7	5	5	JH053	6	20	38 48 58	10~13	10°~20°	G° ≥ A+2 and G° ≤ A+5
										22		10~15		
										25		10~20		
										25		10~13		
8	12	8	12	6 × 1.0	5	6	26		8	25	10~15			
										30	10~20			
										30	10~20			
10	+0.015 0	14	10	16	8 × 1.25	10	7		10	30	10~20			
										35	10~25			
										36	10~30			
										40	10~40			
										50	10~40			
13	+0.018 0	17	12	16	8 × 1.25	10	8	13	35	10~25				
									40	10~30				
									45	10~40				
									50	10~40				
									60	10~50				

●Order: Catalog No. $[D] \times [T] \times [L] \times [W] \times [E] \times [A] \times [G]$

備注: 1. 圖面以外之特殊規格可定制。
2. 依客戶來圖報價。

Remark: 1. Special product is available.
2. The price is per the provided drawing.