


附牙定位梢 DOWEL PINS WITH THREAD

塑膠模用
Plastic mold accessories

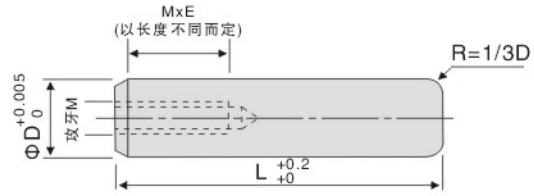

Material 材質	Hardness 硬度
SK-3	HRC56°~60°
FDAC	HRC33°~38°

Type	L	D							
		6	8	10	12	13	14	16	20
JH090	20	5.8	6.2	7.4	9.2				
	25	5.8	6.2	7.6	9.2				
	30	5.8	6.2	7.8	9.2	16.0	16.0	18.0	33.0
	35	5.8	6.6	7.8	9.2	16.0	16.0	18.0	33.0
	40	5.8	6.6	7.8	10.0	16.0	16.0	18.0	34.0
	45	6.2	7.0	8.0	10.4	16.0	16.0	19.0	34.0
	50	6.2	7.0	8.4	11.0	16.4	16.4	19.0	35.0
	55	6.6	7.8	9.4	11.6	19.0	19.0	21.6	35.0
	60	6.6	7.8	9.4	11.6	19.0	19.0	21.6	37.0
	65	7.8	8.6	10.2	12.4	21.0	21.0	23.0	38.0
	70	7.8	8.6	10.4	12.8	21.0	21.0	23.0	38.0
	75	9.0	9.8	11.0	13.2	24.0	24.0	26.0	40.0
	80	9.8	10.0	11.4	13.2	24.0	24.0	26.0	40.0
	90	11.4	12.0	12.6	15.2	25.0	25.0	28.0	43.0
	100	13.4	14.0	15.0	17.2	29.0	29.0	30.0	51.0
	110	15.4	16.4	17.0	19.2	33.0	33.0	34.0	51.0
	120	17.4	18.4	19.0	22.0	37.0	37.0	36.0	61.0
	130		21.4	21.4	23.0	42.0	42.0	43.0	67.0
140		25.4	23.4	28.0	46.0	46.0	46.0	69.0	
150		29.4	15.4	32.0	54.0	54.0	54.0	85.0	

Order: Type □×□

攻牙Thread: 6ΦM4×0.7 8ΦM5×0.8 10ΦM6×1.0 12ΦM8×1.25 14MΦ8×1.25 16MΦ8×1.25 20MΦ8×1.25

E: L30内 e=10 < L30~50 e15 < L50以上e20